


REVISION HISTORY			
REV	DESCRIPTION	DATE	AUTHOR
A	Changed Y Number from 111225 to 111227	10/21/2011	lkarr

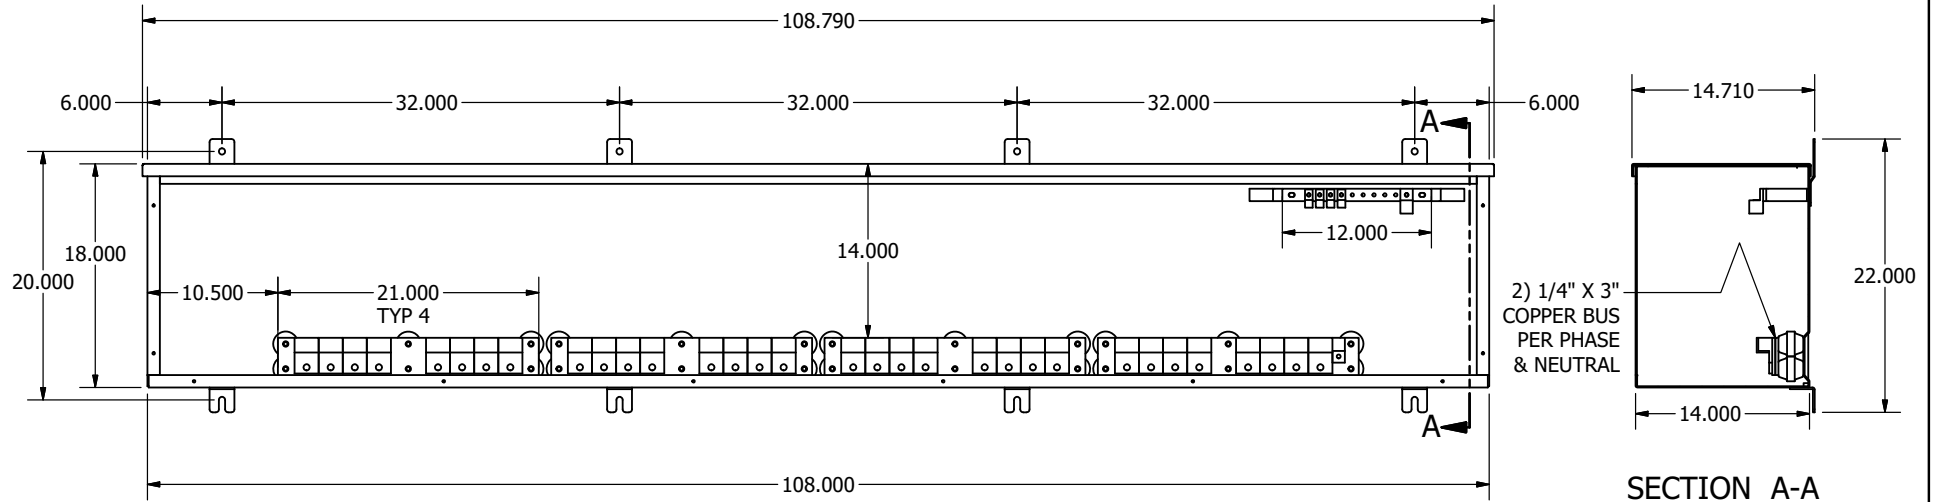

LINE FEED: LEFT OR RIGHT	LOAD FEED: TOP	GROUND LUGS: (TOTAL)
LINE LUGS: 4) #4-350 MCM PER PHASE & NEUTRAL	LOAD LUGS: 12) #3-350 MCM PER PHASE & NEUTRAL	4) #14-2/0 MCM

UL REQ 75°C CONDUCTOR SIZING

TOLERANCES (EXCEPT WHERE NOTED)	lkarr	10/21/2011
FEATURES	± .005	
SHEET METAL	± .020	
ANGULAR	± .5°	
REMOVE BURRS & SHARP CORNERS		



MANUFACTURING INFORMATION	
MATERIAL: 12 GA CRS	QTY PER UNIT: 1 ASSEMBLY
BEND DEDUCTION: .180	FINISH: PC HAMMER GRAY

JOB #:

1200A-9FT TAP BOX ASSEMBLY
208/120 VAC, 3PHASE, 4WIRE, 65KAIC
NEMA 3R